

Hy-Tex Ultra Dewatering Bags for Pumped Sediment Control



Cut open bag to show trapped silt

Hy-Tex Ultra Dewatering Bags provide an effective way to collect harmful sediments from dirty water pumped out of excavation works (such as foundations, pipe line construction, water, sewer and utility trenches, waterways and lakes) that would otherwise pollute the surrounding environment.

It is a legal requirement to prevent silty water from leaving site untreated, and a finable offence if you do not take appropriate pollution control measures. The Environment Agency Pollution Prevention Guidelines PPG6 (See side panel), in summary, require that the majority of suspended solids (gravel, sand, and silt) must be removed from site water before it is discharged into a drain, sewer or watercourse.

Traditionally settlement methods (such as straw bale structures or settlement ponds/tanks) are often ineffective, rely on slow water movement, long settlement times, expensive and time consuming tank maintenance and large works areas.

Ultra Dewatering Bags are an efficient, practical, quick, simple and cost effective alternative solution to manage this ongoing environmental problem of removing suspended solid pollutants from pumped water on construction sites.

Sediment-laden water is simply pumped into the high quality filter bags, which trap the solids inside and allow filtered water to flow freely out through the geotextile fabric to disperse into the surrounding ground or another collection point.

Ultra Dewatering Bags can also be used for gravity feed applications such as outfall pipes from site drainage or lagoons.

The silt filter bags provide a passive non-mechanical solution, without the use of excessive or specialist machinery (other than possible lifting equipment when full), and do not require a large work area.

The sediment bags are also light, compact and easy to store, with minimal cleaning up required - when full just dispose of the bag and replace with another bag.

The Ultra Dewatering Bags detain both oil and sediment, offering a combination of benefits not available in alternative products. They can also be used to contain contaminated sediment whilst treatments are applied (such as flocculants or absorbents).

The standard 1.80 x 1.80m Ultra Dewatering bags has the capacity to trap near 1 tonne of silt and cope with flow rates up to 1,890 l/min, while the larger 3.05 x 4.55m bags can trap over 4 tonnes of silt and cope with flow rates up to 5,670 l/min.

The Environment Agency

"Working at construction and demolition sites:
PPG6 Pollution Prevention Guidelines"

"Poor management of silt and silty water is a major cause of serious pollution incidents from construction sites. Silt for these purposes is a fine inert sediment derived from soil and rocks.

Silt pollution can: damage and kill aquatic life by smothering and suffocating; reduce water quality; cause flooding by blocking culverts and channels..."

"You must not discharge any silty water to a drain or watercourse without prior treatment to settle or remove suspended solids. If you've identified that you will be generating silty water, identify suitable means to treat the water before discharge; examples include: lagoons, settlement tanks, silt traps grassy areas that slow water and allow solids to settle..."

"You must have prior permission from the local sewerage provider if you intend to discharge settled water to the foul sewer because this will be regarded as a trade effluent.

You must have prior permission from [the Environment Agency] if you need to discharge anything to a watercourse. In Scotland if you comply with certain conditions, a discharge will be covered by a General Binding Rule and you will not need to contact SEPA."

Property	ASTM Test	Value
Material		Non-woven polypropylene geotextile
Grab Tensile Strength	D 4632	912 N (205 lb)
Elongation	D 4632	50%
Trapezoid Tear	D 4533	378 N (85 lb)
Puncture Resistance	D 4833	578 N (130 lbs)
Mullen Burst	D 3786	2,758 kpa (400 psi)
Permittivity	D 4491	1.4 sec ⁻¹
Pore Size O ₉₀		90 micron
UV Stability	D 4355	70% strength retained after 500hr
Weight	D 5261	272 g/m ² (8 oz/yd ²)
Flow Rate	D 4491	3,660 l/min/m ² (90 gal/min/ft ²)

Hy-Tex Ultra Dewatering Bags for Pumped Sediment Control



Usage Guidelines

Ideally position the Ultra Dewatering Bag on a slope, so incoming water flows downhill through the bag, and, as a precaution, install Terrastop Premium silt fence down slope of the bags to control any potential run-off pollution.

The bag is fitted with a collar which fits around delivery hoses or connectors. Strap the neck of the Ultra Dewatering Bag tightly to the discharge hose using the attached tying cord.

To increase filtration efficiency place the bag on an aggregate, or a layer of Hy-Pave tiles, to maximize water flow through the under surface of the bag.

Plan ahead for removal, if the filled bags are to be lifted for disposal then place suitable lifting straps under bag prior to pumping, alternatively you can roll the bags into a digger bucket.

Regularly check the bags. The Ultra Dewatering Bag is full when it no longer can efficiently filter sediment or pass water at a reasonable rate.


Flow rates will vary depending on the size of the Ultra Dewatering Bag, the type and amount of sediment discharged into the bag, the type of ground, rock or other substance under the bag and the degree of the slope on which the bag lies.

Under most circumstances Ultra Dewatering Bags will accommodate flow rates of up to 2,730 l/min for the 1.80 x 1.80m bags and 6,816 l/min for the 3.05 x 4.55m bags.

Use of excessive flow rates, or overfilling Ultra Dewatering Bags with sediment, may cause ruptures of the bags or failure of the hose attachment straps.

Dispose of the Ultra Dewatering Bag as directed by the site engineer. Normally allow the bags to dry in place then either cut open, spread and landscape on site or remove and dispose of the filled bags (Heavy lifting machinery may be required).

Illustration of Typical Ultra Dewatering Bag Use

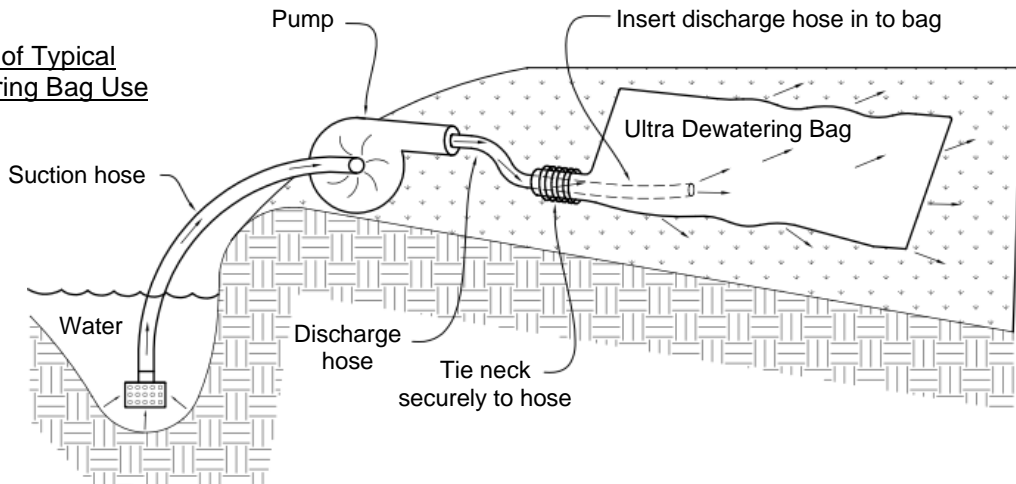

Size	Code	Surface Area	Max Flow Rate	Max Pump Size	Sediment Capacity	Oil Capacity
1.80 x 1.80 m (6 x 6 ft)	9724	6.68 m ² (72 ft ²)	1,890 l/min (500 gal/min)	10 cm (4 inch)	0.51 m ³ / 980 kg (18 ft ³ / 2,160 lbs)	14 l (3.7 gal)
3.05 x 4.55 m (10 x 15 ft)	9725	27.87 m ² (300 ft ²)	5,670 l/min (1,500 gal/min)	15 cm (6 inch)	4.20 m ³ / 4,082 kg (150 ft ³ / 9,000 lbs)	57 l (15.1 gal)

Notes:

Flow/Dewatering rates will vary according to soil type (Sand typically dewateres at the fastest rate, while clay dewateres at the slowest). Clay may also blind over the fabric in some instances, significantly reducing flow.

Max flow rate is a cautious figure based on a significant de-rating of the clean fabric flow rate of approx 3,660 l/min/m² (90 gal/min/ft²) to allow for pump pressure build up from silt accumulation.

Sediment capacity is calculated using wet sand weight of approx 1,920kg/m³ (120 lbs/ft³) and an average bag fill height of approx 160mm

Oil capacity is estimated at low flow conditions with approx 2.09 l/m² (0.5 gal/ft²) absorption capacity

All data stated and the recommendations made herein are offered free of charge and are accurate to the best of our knowledge. Hy-Tex (UK) Ltd assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. Hy-Tex disclaims any and all express, implied, or statutory standards, warranties or guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, material, or information furnished herewith. Final determination of the use of any information or material, or how it is useful, and whether the use infringes any patents is the sole responsibility of the user.