



Agrotextiles



Biodegradables



Geotextiles



Specialist



Wildlife



Living Walls &
Roofs



Accessories



Hy-Pave Dura

Hy-Pave Dura porous cellular pavers are a cost effective solution to worn and rutted grassed areas, displaced gravel and for source control of surface water run-off.

The strong, interlocking, plastic tiles create permeable, reinforced surfaces for a variety of applications, offering an environmentally friendly alternative to tarmac or concrete blocks. Each plastic tile is made from 100% recycled HDPE and has a low carbon footprint.

The main benefit over traditional surfaces is the permeability which allows the surface water to drain through the tiles down to the water table - making them fully compliant with Sustainable Urban Drainage Systems (SUDS) and the Flood and Water Management Act 2010 which encourage the use of permeable surfaces to mitigate against flooding in built up areas.

Hy-Pave Dura can be filled with soil and seeded, as the cell structure and open base is designed to promote unrestricted grass root growth to create a naturally growing grass surface that is stabilised and reinforced to withstand frequent trafficking.

Alternatively, the tiles can be filled with gravel, as the cells effectively retain the loose fill to prevent loss or displacement, whilst also preventing rutting (making them ideal for wheel chair access).

Features/Benefits:

- Load bearing capacity up to 160 tonnes/m²
- Vehicle compression strength of 20 tonnes axle loading (meets DIN 1072 standard).
- Manufactured from recycled polymer which is chemically inert and non-toxic
- Easily cut with hand or power saw
- High open area to maximise visual appeal of finished surface
- Pavers filled with grass or gravel are SUDS source control compliant
- Choice of colours for marker pegs bays and signage
- Pre-assembled in 1 m² panels for quick installation
- 3mm wall thickness for reliable performance
- Designed to resist lateral movement, improve traction and allow expansion and contraction
- Promotes optimum grass growth, root protection and surface stabilisation.
- The open cell structure provides environmentally friendly high surface water infiltration
- Offers a naturally pleasing appearance
- Made in the UK
- Made from 100% Recycled HDPE
- Low Carbon Footprint

Application Categories: Tree Protection, Grass Reinforcement and Porous Paving

Hy-Tex (UK) Limited
Aldington Mill, Mill Lane,
Aldington, Ashford, Kent
TN25 7AJ

☎ 01233 720097
✉ sales@hy-tex.co.uk
🌐 www.hy-tex.co.uk
📞 01233 720098





Agrotextiles



Biodegradables



Geotextiles



Specialist




Wildlife



Living Walls &
Roofs




Accessories

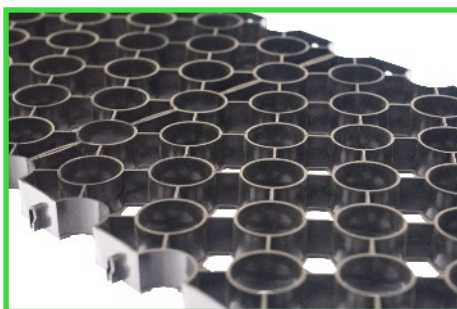

Applications:

- Car and coach parks (Grass or gravel)
- Overspill/overflow grass car parks
- Emergency services (Fire access routes)
- HGV service access routes
- Aircraft taxiways & helipads
- Walkways and disabled access routes (Disability Discrimination Act 1995)
- Golf buggy paths
- Driveways and residential lawn parking
- SUDS source control
- Shed foundation/base

Feature	Hy-Pave Dura
Tile Size:	500mm x 500mm x 40mm (4 tiles/m ²)
Tile Weight:	1.28kg
Wall Thickness:	3mm
Maximum Load:	160 tonnes/m ²
Maximum Axle Load:	20 tonnes
Colour:	Black (other colours available subject to order quantity)
Working Temperature:	HDPE = -20 to +80°C, PP = -20 to +70°C
Fire Rating:	HB tested to BS EN 11925-2 2010
Material:	Recycled or virgin UV stabilised polyethylene/polypropylene (HDPE standard), chemically inert and non-toxic, frost resistant
Pallet Quantity:	max 60m ² per pallet

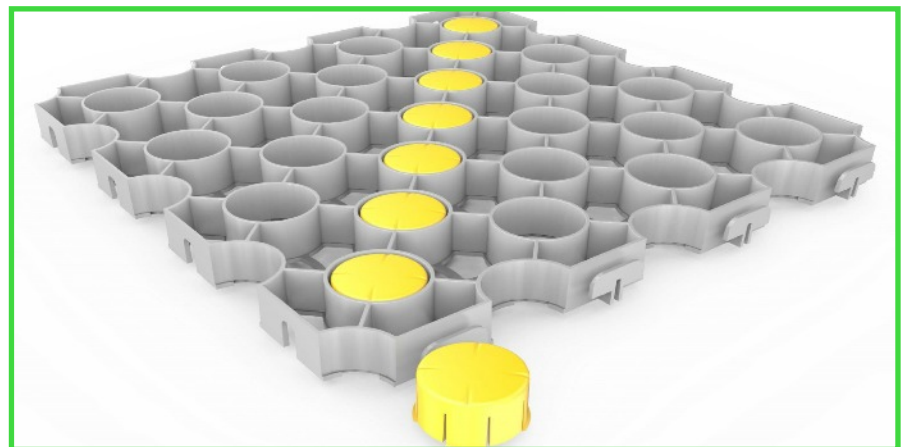

Application Categories: Tree Protection, Grass Reinforcement and Porous Paving

Hy-Tex (UK) Limited
Aldington Mill, Mill Lane,
Aldington, Ashford, Kent
TN25 7AJ

01233 720097
sales@hy-tex.co.uk
www.hy-tex.co.uk
01233 720098





Agrotextiles



Biodegradables



Geotextiles



Specialist



Wildlife



Living Walls &
Roofs



Accessories

Hy-Pave Dura Installation

- The porous plastic pavers should be assembled on a excavated and well prepared sub-base, a minimum of 100mm thick and up to 475mm depending on the subgrade CBR rating and the regularity and weight of load (475mm thick would be for HGV and Fire Truck access).
- The stone sub-base should be a permeable/porous, reduced fines, free draining angular stone with the size region of 10mm to 50mm (type 3 or type 1X) laid on a woven geotextile. A vibrating whacker plate should be used to properly consolidate this sub-base stone.
- A layer of geotextile should also be laid over the sub-base stone to separate the fine soil/sand root zone (for grass surface) or gravel bedding (for gravel surface). The woven geotextile layers prevent fine material penetrating, but will allow water to filter through.
- A minimum 50mm bedding layer of rootzone soil (sand:compost mixture in the ratio of 60:40 mix) should be placed as the bedding layer for grass or a gravel bedding for a gravel finish.
- Hy-Pave porous pavers can then be laid level and connected correctly then be fill with grass rootzone or 4 to 10mm angular gravel fill. For a grass finish do not overfill the pavers, seed can then be applied and a small top dressing of soil applied to aid germination.
- On slopes, optional fixing pegs can be applied to enhance anchorage and minimise slippage.
- Please note that for all Hy-Pave grass paver / gravel paver installations, we strongly recommend that all areas should have sufficient drainage prior to the installation. Failure to ensure this may



Application Categories: Tree Protection, Grass Reinforcement and Porous Paving

Hy-Tex (UK) Limited
Aldington Mill, Mill Lane,
Aldington, Ashford, Kent
TN25 7AJ

☎ 01233 720097
✉ sales@hy-tex.co.uk
🌐 www.hy-tex.co.uk
☎ 01233 720098

